


---

DIESEL FILTER HOUSING TOOL FOR FORD TRANSIT

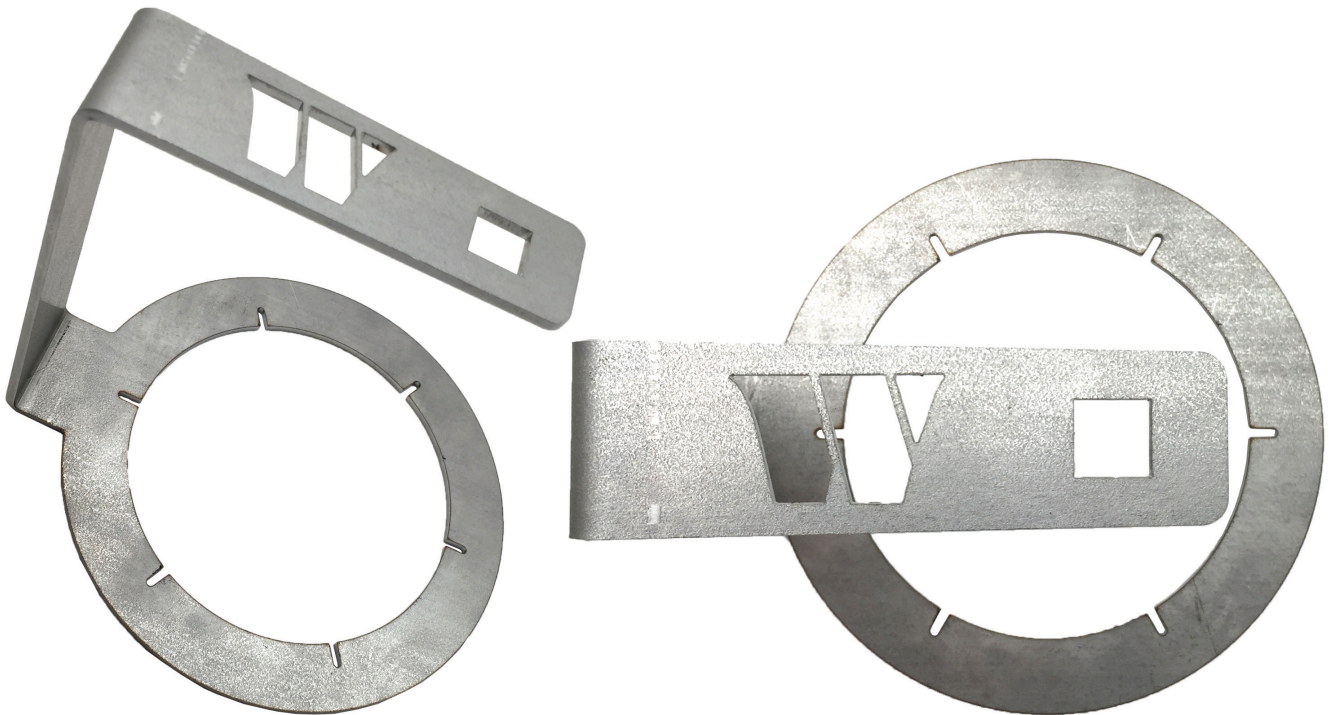

### Information

---

- Due to the awkward and hard to reach location of the fuel filter traditional methods of removal are ineffective.
- This can potentially damage the fuel filter housing which can be quite costly.
- 1/2" drive
- Suitable for use on: Transit (2013>), Transit Custom (2012>), Tourneo(2012>)

### Precautions

---


Always wear safety gear.  
Working in a clean and safe environment.  
This task should be carried out by trained personnel.  
Make sure to consult manufacturers manual.  
Do NOT use with air tools.

### ***Oil Filter Housing Removal***

- 1) From the bottom drain, drain the filter then close it up.
- 2) After removing the filter bowl, lower the mounting tool.
- 3) Fit 4084-ww tool onto the filter bowl.
- 4) Start turning the filter bowl 30 degrees to the left by using a 3/8" drive wrench.
- 5) Then pull the filter housing downwards, which may be sticky on seal.
- 6) Start levering the filter closest to the alignment arrows for removal of the filter, then start rotating the filter anti-clockwise by 10 degrees then remove the filter.

### ***Fitting of the New Filter***

- 7) Lubricate the seal with grease after removing the old filter seal.
- 8) Fill the filter bowl half way with diesel then fit the filter together into the bowl making sure the arrows on both parts align.
- 9) Fit the bowl & filter together to the upper housing, making sure the arrows align.

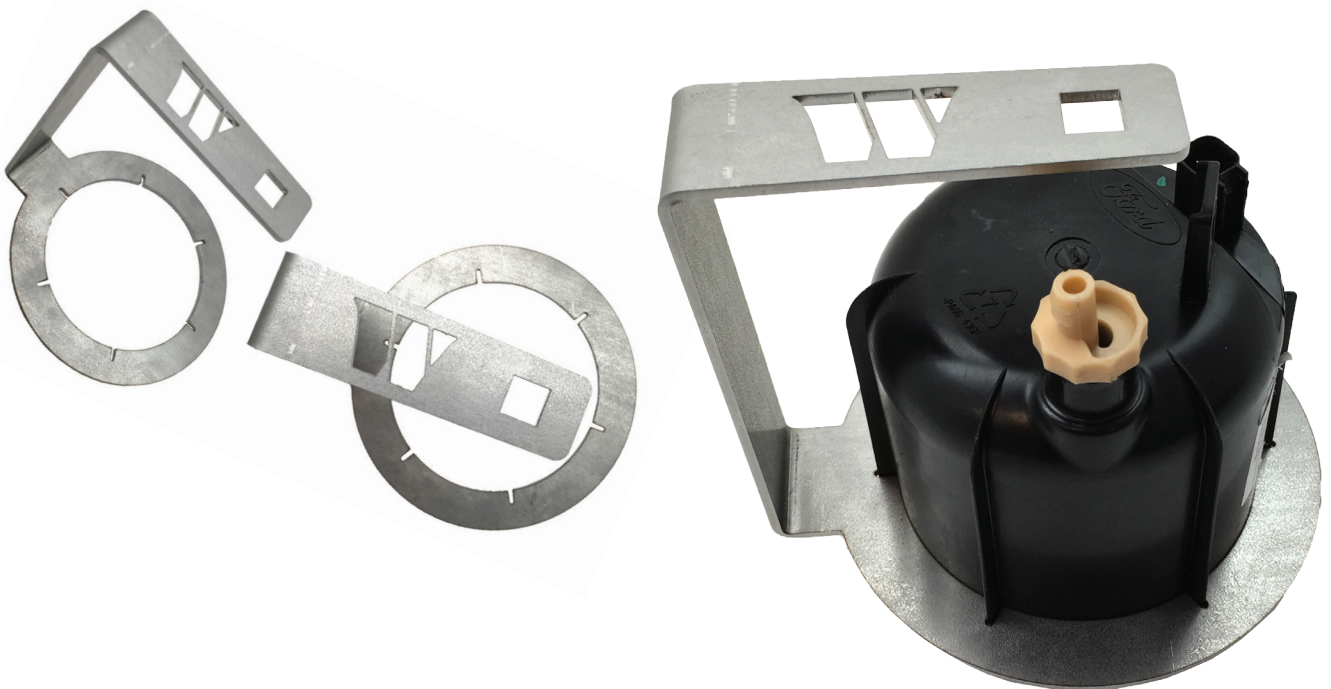

### **Warranty**

---

If you are unsure on how to use the item please contact us. If this item were to fail due to a manufacturing fault or poor workmanship we will replace it. Please contact your local dealer in the event you need to send the item back. Normal wear and tear along with misuse will void any warranty. Consumables are not covered under warranty

Limited **12 month** warranty



Welzh Werkzeug Ltd  
1 - 6 the Green  
Eastriggs  
DG12 6NH  
+44 (0)1461 700120